


MICROCUT® MF2A

For ambitious micro erosion applications requiring a even higher tensile strength

- The **microcut**® MF2A EDM wire is suitable for ambitious microerosion applications requiring a even higher tensile strength
- The copper-cladded steel core safely absorbs tensile forces, even with the smallest diameters
- Functional layer structure for finest processing with absolute reproducibility
- Limited manufacturing tolerances
- Can be used on all machines with fine wire option

Technical data

Core	Copper-cladded steel
Coating material	Gamma brass
Tensile strength	2,400 MPa / 348,000 PSI
Elongation	>1%
Color	Grey
Diameter (mm)	0.05 - 0.07 intermediate dia. available
Diameter tolerance	+/- 0.0005 mm

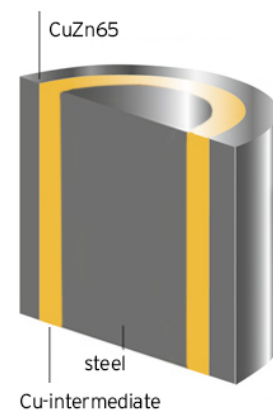

Delivery program

Diameter [mm]	0.05	0.07	0.10
BK100: 5,000 m	●	●	
BK100: 10,000 m	●	●	
bedra4: 20,000 m		●	●
bedra4: 30,000 m		●	●